

# SLFD1000-SL

## FLOOR DRAIN - SQUARE ADJUSTABLE LEVELING STRAINER

LOCATION: \_\_\_\_\_

### Specification & Function

**Specification:** SUNLite SLFD1000-SL coated cast iron floor drain with anchor flange, weep holes, clamping collar, adjustable leveling square nickel bronze top with secured grate, vandal proof screws, 1/2" NPT trap primer (plugged) and bottom outlet.

**Function:** General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

### Pipe Size


SUFFIX	DESCRIPTION
2	2" (51) Pipe Size
3	3" (76) Pipe Size
4	4" (102) Pipe Size

### Outlet Type

SUFFIX	DESCRIPTION
NH	No Hub
PO	Push On

### Strainer

SUFFIX	DESCRIPTION
-5SL	5" (127) Dia., Nickel Bronze

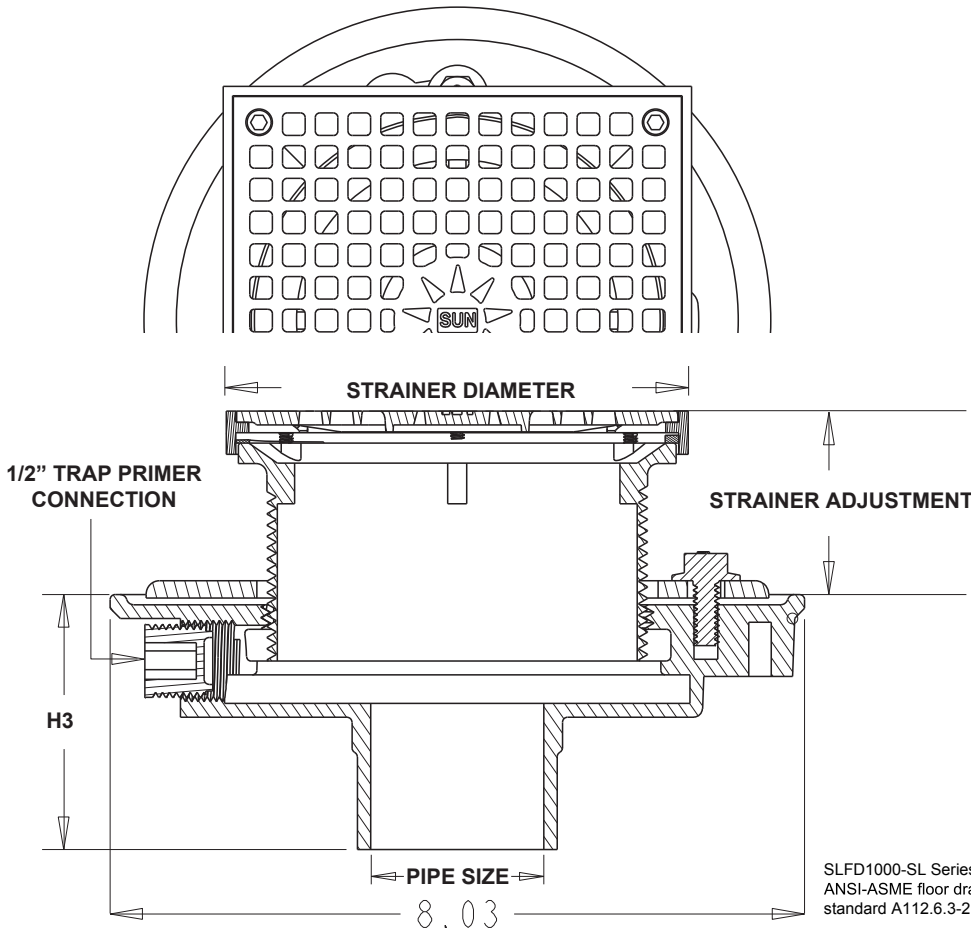

SLFD1000-SL Series meets ANSI-ASME floor drain standard A112.6.3-211

Metric equivalents see chart below. (Dimension) Denotes Millimeters

STRAINER DIAMETER	STRAINER ADJUSTMENT		Free Area	Test * Loading
	MIN	MAX		
5"(127)	1.55	2.40	9.0 in <sup>2</sup>	MD

\* ANSI load class - MD = Medium Duty (between 2,000 LBS and 4,999 LBS)

Pipe Size	BODY HEIGHT (H3)	
	No Hub	Push On
2"	3.0	3.0
3"	3.0	3.0
4"	3.0	3.0

PROJECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_